A01 / GROUND FLOOR

Villa 02 | 16.00 x 12.00 envelope | Wall height 3.20 | Structural grid on S01

VENTRA QA / R1

ROOM ZONES

Floor areas measured
to wall centrelines.
Do not deduct wall strips.

WALLS

External: 200 mm
Internal: 120 mm
Clear height: 3.20 m

SYMBOLS

Blue double line: window
Door arc: door set
WC / B / SH: fixtures
Yellow line: garage door

DATA SHEETS

A03: opening schedule
A04: finishes and services
S01: structure
S02: bar schedule

N

A02 / FIRST FLOOR

Villa 02 | 16.00 x 12.00 envelope | Wall height 3.20 | Structural grid on S01

VENTRA QA / R1

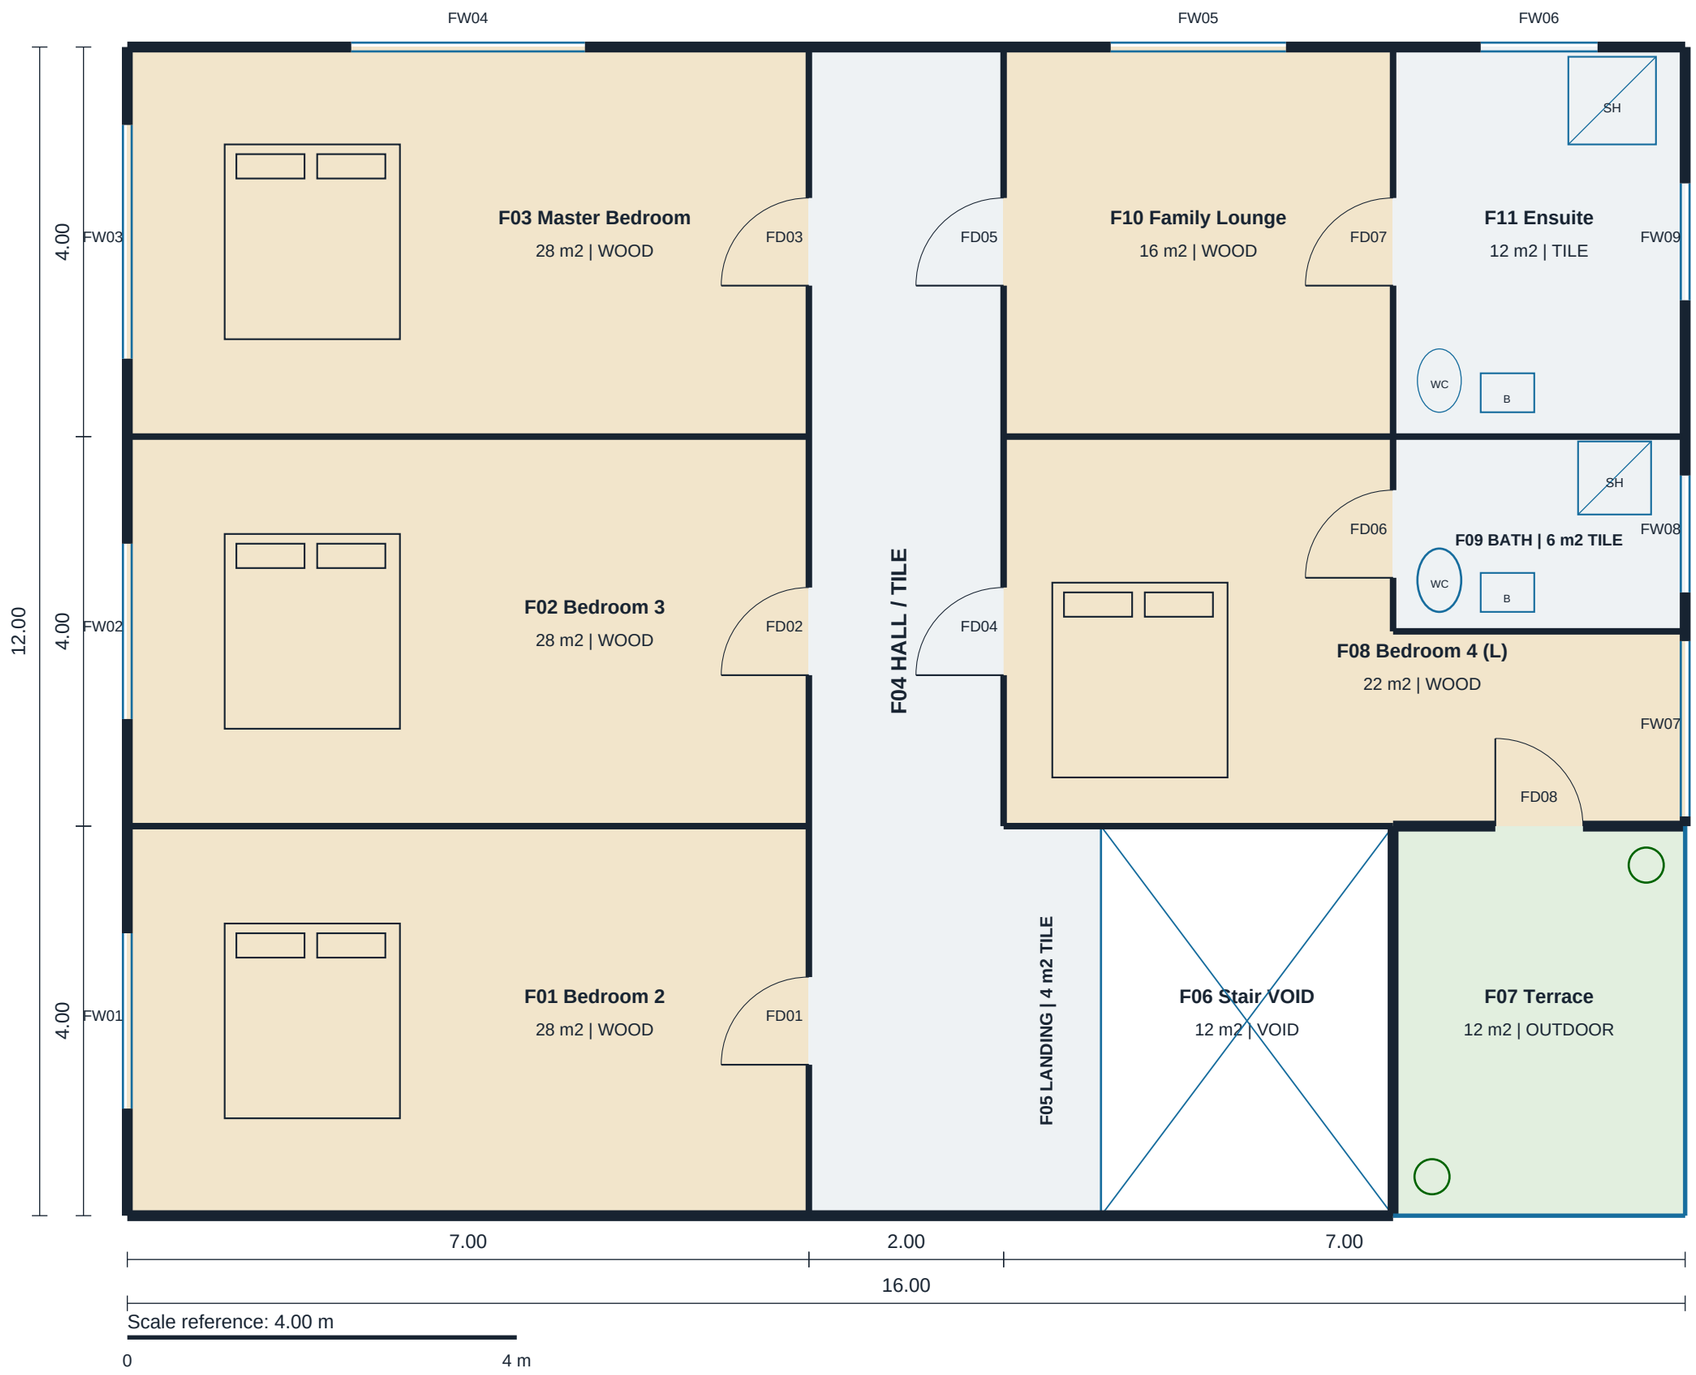

ROOM ZONES

Floor areas measured
to wall centrelines.
Do not deduct wall strips.

WALLS

External: 200 mm
Internal: 120 mm
Clear height: 3.20 m

SYMBOLS

Blue double line: window
Door arc: door set
WC / B / SH: fixtures
Yellow line: garage door

DATA SHEETS

A03: opening schedule
A04: finishes and services
S01: structure
S02: bar schedule

N

S01 / STRUCTURAL SCHEDULE

Declared benchmark structure - no engineering design inference required

VENTRA QA / R1

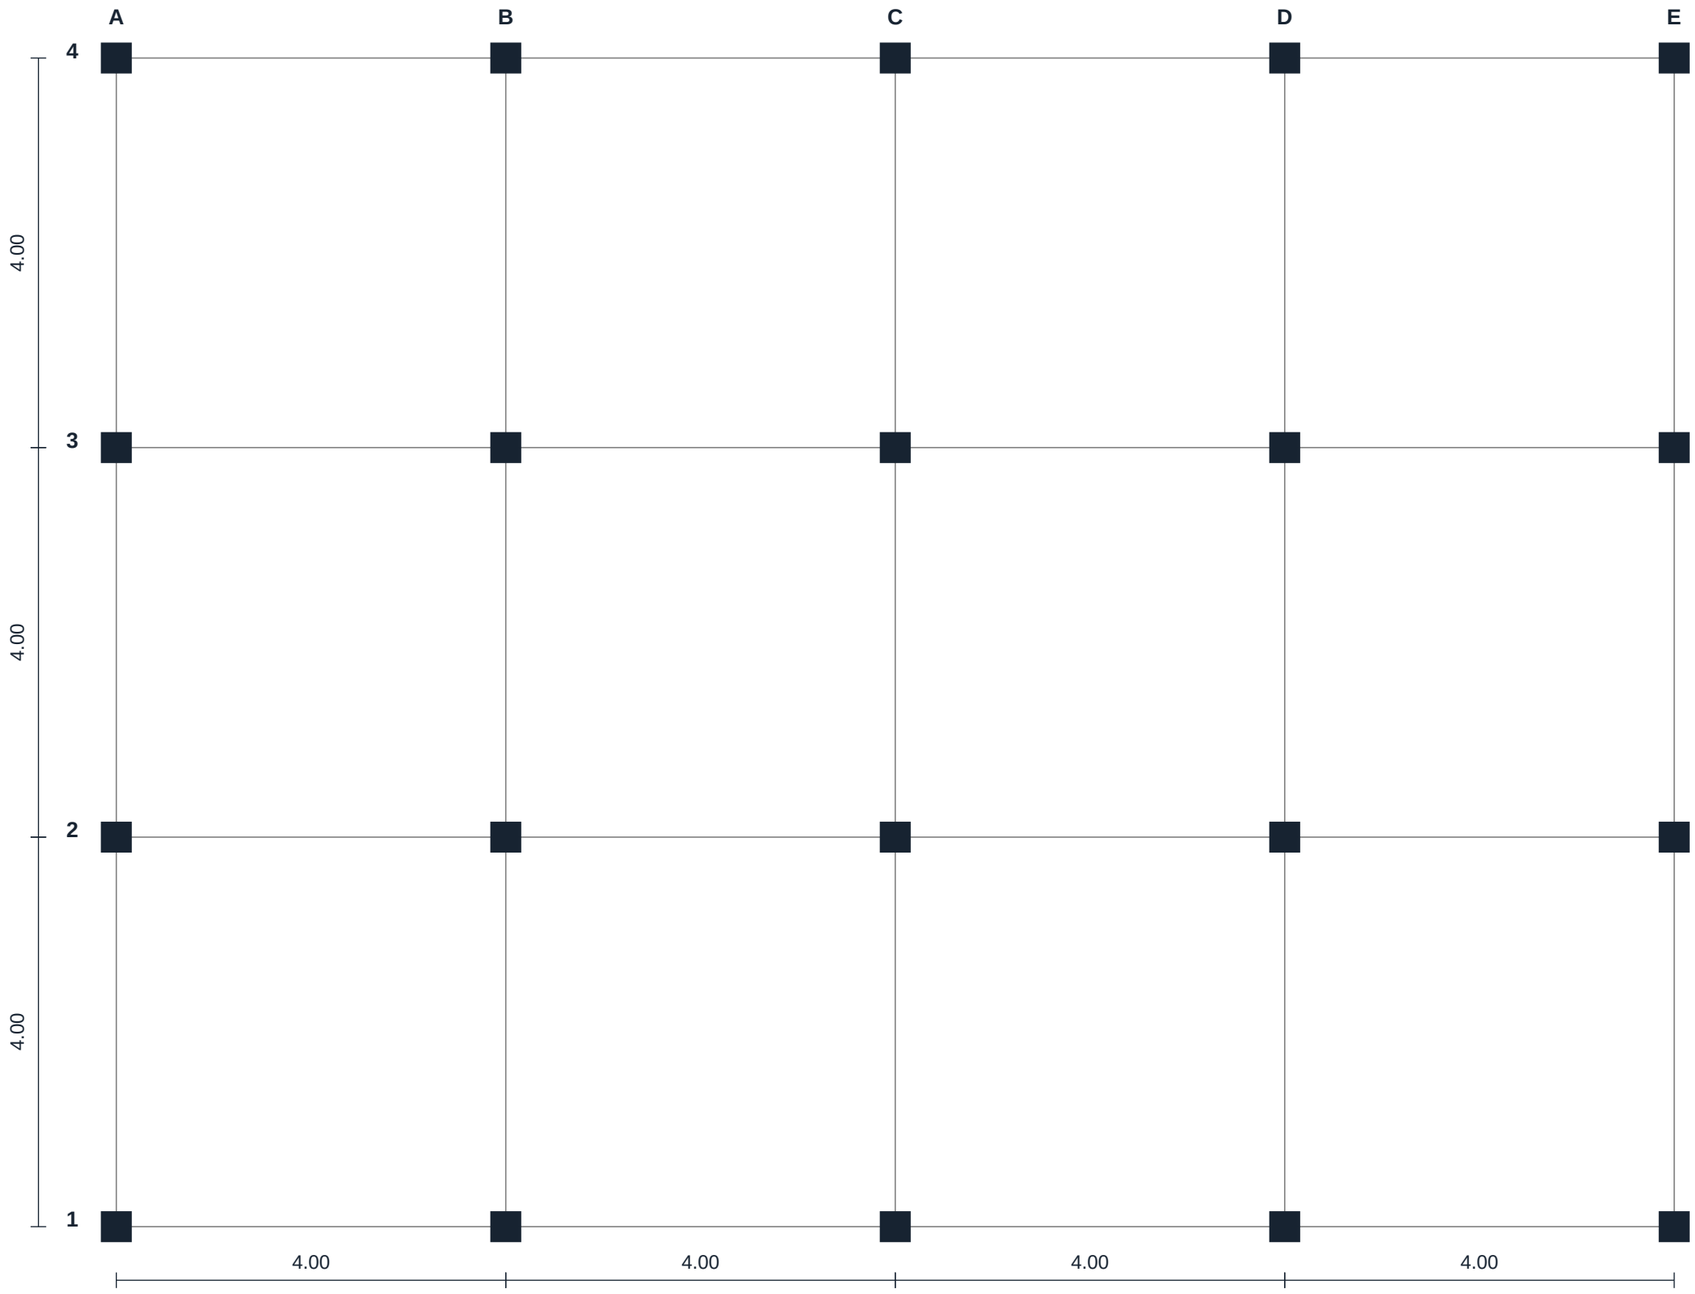

20 foundation locations on the 5 x 4 grid.

Excavation pit each: 1.90 x 1.90 x 1.00.

Blinding each: 1.70 x 1.70 x 0.10.

RC footing each: 1.50 x 1.50 x 0.45.

Pedestal each: .45 x .45 x .60.

Columns: .30 x .30; net clear 2.95 m.

20 GF + 19 FF column-storeys.

Omit FF column at E1 above open terrace.

Beam overall: .25 x .45; slab .20.

Bill ONLY .25 downstand depth.

First-floor beam centreline total: 120 m.

First floor omits D1-D2 through stair void (4 m).

Roof beam total: 117 m.

Roof omits E1-E2 (4 m) and last 3 m of A1-E1.

GF slab: .15 thick, entire 16 x 12.

First slab: .20; omit 3 x 4 stair void.

Roof slab: .20; omit 3 x 4 terrace.

Stair flight concrete not supplied: PENDING.

Do not invent an RC stair quantity.

A03 / Door and window schedule

All tagged openings on A01-A02 govern quantities. All dimensions are metres. Unspecified interior doors: 0.90 x 2.10. Windows use scheduled sill heights.

Ground floor

ID	Host wall	Type	Width	Height	Sill
GD01	GE-S	door	1.20	2.20	0.00
GD02	GE-S	garage_door	3.00	2.40	0.00
GD03	GE-N	door	0.90	2.10	0.00
GD04	GI-1	door	0.90	2.10	0.00
GD05	GI-2	door	0.90	2.10	0.00
GD06	GI-8	door	0.90	2.10	0.00
GD07	GI-3	door	0.90	2.10	0.00
GD08	GI-1	door	0.90	2.10	0.00
GD09	GI-1	door	0.90	2.10	0.00
GD10	GI-2	door	0.90	2.10	0.00
GD11	GI-2	door	0.90	2.10	0.00
GW01	GE-W	window	1.20	1.20	1.40
GW02	GE-W	window	1.80	1.50	1.00
GW03	GE-E	window	1.80	1.50	1.00
GW04	GE-E	window	2.40	1.50	1.00
GW05	GE-N	window	2.40	1.50	1.00
GW06	GE-N	window	1.80	1.50	1.00

First floor

ID	Host wall	Type	Width	Height	Sill
FD01	FI-1	door	0.90	2.10	0.00
FD02	FI-1	door	0.90	2.10	0.00
FD03	FI-1	door	0.90	2.10	0.00
FD04	FI-2	door	0.90	2.10	0.00
FD05	FI-2	door	0.90	2.10	0.00
FD06	FI-7	door	0.90	2.10	0.00
FD07	FI-9	door	0.90	2.10	0.00
FD08	FE-T2	door	0.90	2.10	0.00
FW01	FE-W	window	1.80	1.50	1.00
FW02	FE-W	window	1.80	1.50	1.00
FW03	FE-W	window	2.40	1.50	1.00
FW04	FE-N	window	2.40	1.50	1.00
FW05	FE-N	window	1.80	1.50	1.00
FW06	FE-N	window	1.20	1.20	1.40
FW07	FE-E	window	1.80	1.50	1.00
FW08	FE-E	window	1.20	1.20	1.40
FW09	FE-E	window	1.20	1.20	1.40

A04 / Measurement and finishes

This is a fictional test specification. Scheduled quantities and dimensions override pictorial symbols. It is not a structural design or approved tender.

MEASUREMENT DATUM: rooms, slabs and paving are measured to wall-centreline zones. No wall-footprint deductions. Do not silently switch to clear-net floor areas.

OPEN STAIR ACCESS: on the first floor, hall and stair landing connect without a wall along x=9, y=0..4. VOID is x=10..13, y=0..4. Terrace is entered through FD08 on its north boundary.

WALLS: external 200 mm; internal 120 mm; clear height 3.20 m. Masonry measured by NET face area: length x height, minus full door/window openings. Transfer terrace-facing partitions into external wall class.

PLASTER: both faces of internal walls plus inner face of external walls. Exterior render/paint not in this benchmark. Interior paint excludes wet wall tiles and kitchen backsplash.

WET ROOMS: G02 laundry, G03 WC/shower, F09 shared bath, F11 ensuite. Waterproof entire floor. Wall waterproofing height2.00 m; tile height2.40 m. Deduct only the opening portion within these heights. Four wet windows are 1.20 x 1.20 at sill1.40 m: GW01, FW06, FW08, FW09. Four wet-room doors are GD07, GD08, FD06, FD07.

CEILINGS: paint all enclosed areas. Gypsum ceiling excludes GF garage, GF stairs and FF stair landing. Upper VOID has no floor finish; terrace is outdoor tile and has no internal ceiling.

FLOORS: see zone finish on plans. Wood ONLY on floors, never walls. Garage epoxy; internal ceramic in halls, wet rooms, kitchen and stairs; terrace outdoor ceramic.

WATERPROOFING: roof excludes open terrace; terrace is a separate line. No parapet upstands or wastage in this synthetic takeoff.

KITCHEN: L base cabinet measured 3.00+2.00 =5.00 linear metres, no double-counted corner. Backsplash is 0.60 high along5.00 m. Include one hob/hood package.

FORMWORK: footing/pedestal sides only; columns full four sides at clear length2.95. Slab soffit includes beam undersides; beam formwork contains ONLY two downstand sides. No duplicate beam soffit.

PRICING: no statutory/live market prices supplied in input. For repeatable commercial checks, apply the separate control/test-rates.csv in the rate catalogue. Rates are fictional AED values.

MISSING SCOPE: stair flight reinforced-concrete volume, earth backfill, exterior render, furniture supply and irrigation have no measured specification. Mark quantity pending / not priced, or explicitly exclude. Do not invent measured quantities.

BOQ: use detailed quantity x test rate, with line amounts rounded to 2 decimals. No contingency or VAT in BOQ subtotal. Quote: add12% overhead/profit, then fictional test VAT5%.

ESTIMATE: independent conceptual area budget. Area = GF envelope + FF envelope minus upper stair void, including terrace. Seven budget rates (AED/m2): substructure180; superstructure650; masonry220; finishes350; openings/fitout180; MEP420; external100. Add one contingency row at10% of those seven rows. This makes8 estimate rows. Fictional test VAT5% is shown separately.

M01 / Declared services schedule

Service quantities below are deliberately specified. They cannot be derived accurately from architecture alone. For this benchmark use these schedules; do not replace them with room-count allowances.

Item	Ground	First	Unit
Light points	28	32	nr
Socket points	34	36	nr
Distribution boards	1	1	nr
Split AC units	4	5	nr
Insulated AC pipes	40	50	m
Smoke detectors	4	4	nr
Water supply pipes	45	35	m
Waste pipes	35	25	m

Sanitary fixtures: one toilet pan, one basin and one shower in each of G03, F09, F11. Separate kitchen sink in G04 and laundry sink in G02. Washing machine furniture cue is present; appliance supply is excluded from priced scope.

External works: driveway paving10 x4 m; landscaping10 x6 m. Both are outside the building and must not increase internal floor area. Terrace railing south edge3 m + east edge4 m, height1.10 m.

No furniture items are priced except the specified kitchen base cabinets and hob/hood package. Furnishing defaults in the 3D preview are proposed design assets and must not inflate a measured BOQ.

S02 / Declared bar schedule

Formula: theoretical unit mass = diameter(mm)^2 /162 kg/m. Cut lengths include declared hooks/laps. Add no extra percentage for waste. Sum all rows without intermediate rounding; round total once to 0.001 kg.

Element	Dia mm	Count	Cut length m
Foundation bottom	12	480	1.40
Foundation top	10	480	1.40
Pedestal vertical	16	160	1.20
Pedestal ties	8	100	1.64
Column vertical	16	312	3.70
Column ties	8	780	0.96
Beam longitudinal incl. laps	16	1	1044.00
Beam stirrups	8	1185	1.32
Slab mats (both slabs)	12	1	7200.00

Stair reinforcement is intentionally not supplied. Foundations, columns, beams and slab mats above are the only scheduled reinforcement. Do not infer missing bar quantities from an AI-generated 3D image.